

(19) World Intellectual Property
Organization
International Bureau



528367



(43) International Publication Date
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number
WO 2004/026600 A1


- (51) International Patent Classification⁷: **B60F 1/04**
- (21) International Application Number:
PCT/SE2003/001438
- (22) International Filing Date:
17 September 2003 (17.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0202776-1 19 September 2002 (19.09.2002) SE
- (71) Applicant (*for all designated States except US*): AB SJÖLANDERS SMIDES- OCH MEKANISKA VERKSTAD [SE/SE]; Box 153, S-283 23 Osby (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): SJÖLANDER, Jan-Erik [SE/SE]; Götengatan 1, S-283 35 Osby (SE).
- (74) Agents: WENNBORG, Göte et al.; Kransell & Wennborg AB, Box 27834, S-115 93 Stockholm (SE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO utility model (GH), ARIPO patent (GH), ARIPO utility model (GM), ARIPO patent (GM), ARIPO utility model (KE), ARIPO patent (KE), ARIPO utility model (LS), ARIPO patent (LS), ARIPO utility model (MW), ARIPO patent (MW), ARIPO utility model (MZ), ARIPO patent (MZ), ARIPO utility model (SD), ARIPO patent (SD), ARIPO utility model (SL), ARIPO patent (SL), ARIPO utility model (SZ), ARIPO patent (SZ), ARIPO utility model (TZ), ARIPO patent (TZ), ARIPO utility model (UG), ARIPO patent (UG), ARIPO utility model (ZM), ARIPO patent (ZM), ARIPO utility model (ZW), ARIPO patent (ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A VEHICLE ADAPTED FOR DIFFERENT DRIVING MODES, AND A METHOD OF DRIVING SUCH VEHICLES

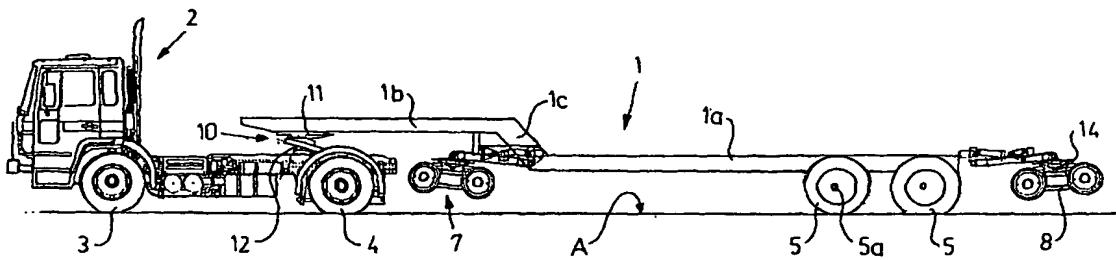

(57) Abstract: A semitrailer (1) includes a road wheel (5) and is coupled to a traction vehicle (2) via a pivotal axle, e.g. of the "turntable"/"kingpin" type. To enable the semitrailer to be driven along a railroad track, the semitrailer is provided with a rail-wheel unit (8) behind the road wheels (5) and with a front rail-wheel unit (7) behind the articulatory axle (10). When the semitrailer is driven on a road surface, both of said rail-wheel units are lifted away from said surface, but can be lowered in turn onto a railroad track so as to lift the road wheels (5) away and to enable the trailer to be disconnected from the traction vehicle so that the semitrailer, disconnected from the traction vehicle, can be driven along the rails of a railroad track. One of the rail-wheel units (7, 8) may be provided with drive means for driving the semitrailer along the rails of a railroad track. Alternatively, the semitrailer can be coupled to a drive vehicle for this purpose. Several semitrailers may be coupled together to form a "train". The present invention also relates to a method of converting the semitrailer from a road-driving mode to a railroad-driving mode.

WO 2004/026600 A1